



BuzziSol 110 - 120V **Product Specification Sheet**

This document contains technical information about the BuzziSol



www.buzzi.space








A sunny globe of light

A simple and versatile pendant light fixture from BuzziSpace. Designed to fit existing acoustic lighting solutions, such as BuzziPleat and BuzziShade. Even standalone it can be a unique lighting centerpiece. This frosted LED globe light hangs from a black powder coated metal heat sink for a modern twist.

Design by BuzziSpace Studio

General

-  Ceiling Suspended
 - LED light source
-  Powder coated metal heatsink
 - Powder coated metal ceiling canopy in black (RAL 9005)
 - Black fabric power cable
-  Wattage: 19W
 - Input Voltage: 110 - 120V
 - Input Frequency: 50/60Hz
-  IP20 Dry Usage
-  If installing on suspended ceiling, verify load capacity prior to installation

Certifications


cULus Listed

Content

Configurations	3
Components	4
Dimensions	5

Configurations

BuzziSol Globe

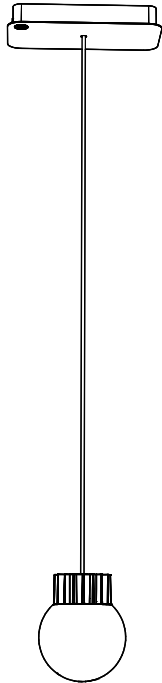

- 🔑 Ceiling Suspended
 - Powder coated metal heat sink
- 🌲 Powder coated metal ceiling canopy in black (RAL 9005)
 - Black fabric power cable
 - Frosted glass globe
- 💡 Lumen Output: 1500 lumen
 - Color Temperature: 3000K
 - Color Rendering Index: 90
 - Lumen per Watt: 77.5 lm/W
 - Dimmable: 1-10 V Protocol
- ✂ Light element: H 7.87" Ø 5.91"
 - Fabric power cord: L 196.85"
- ⚠ If installing on suspended ceiling, verify load capacity prior to installation

Technical components

BuzziSol Pendant

Ceiling canopy

Powder coated metal canopy in black (RAL 9005)
Including mounting bracket

W 5.51" L 11.02" H 1.57"



Heat sink

The light element consists out of a black powder coated metal heat sink fitted with a C.O.B. LED source, finished with a frosted glass globe.



Dimensions

BuzziSol

