
BuzziZone

Product Specification Sheet

This document contains technical information about the BuzziZone



www.buzzi.space










Free standing sound absorbing screen in BuzziFelt

The BuzziZone is a half-height sound absorbing partition wall that provides a little privacy and peace in your living room or office. It is light, colorful, tackable and sound absorbing. In other words, it is ideal for concealing a kids' corner, work area or quiet reading nook. What is more, the BuzziZone suits both modern and traditional interiors.

Design by Sas Adriaenssens

General

-  BuzziZone
 - Panels: Core: Honeycomb
 - Cover: Felt
-  Connection Part: Velcro
 - Fabric, Terra, Hero
-  W 108 cm L 208 cm H 125 cm
W 42.52" L 81.89" H 49.21"
-  17,6 kg | 38.80 lbs
-  Dry use
-  Flat packed
-  Multicolor (different colors for panels A, B, C and connection parts)

Acoustics



Attenuation

Content

Configurations	3
Components	3
Fabrics	4
Dimensions	5
Acoustics	6

Configurations

📍 BuzziZone

Panels: Core: Honeycomb

Cover: Felt



Connection Part: Velcro
Fabric, Terra, Hero

Panel A: L 208 cm H 125 cm
 L 81.89" H 49.21"

Panel B: L 108 cm H 125 cm
 L 42.52" H 49.21"



Panel C: L 38 cm H 69 cm
 L 14.96" H 27.17"

Total: W 108 cm L 208 cm H 125 cm
 W 42.52" L 81.89" H 49.21"

Packaging: W 8,5 cm L 213,5 cm H 130 cm
 W 3.35" L 84.06" H 51.18"

Panel A: 10,8 kg | 23.81 lbs

Panel B: 5,7 kg | 12.57 lbs




Panel C: 1,1 kg | 2.43 lbs

Total: 17,6 kg | 38.80 lbs

Packaging: 22,6 kg | 49.82 lbs

Multicolor

... (different colors for panels A, B, C and connection parts)

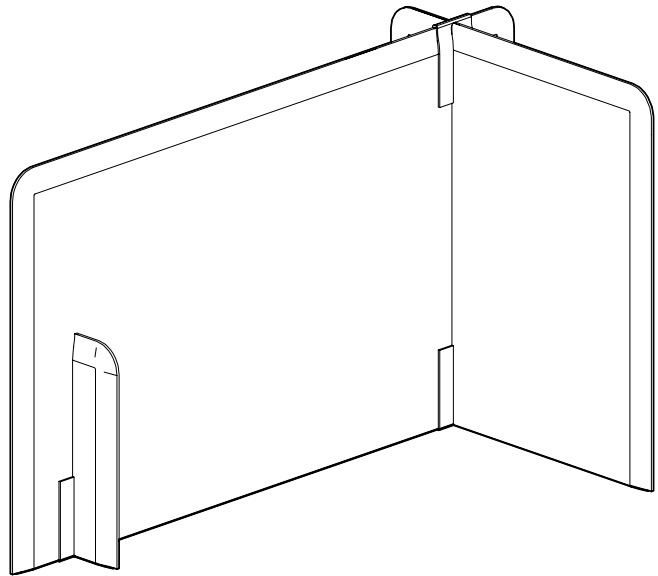

Components


Connections parts



Connection parts available in Fabric
Backside in velcro

Fabrics


Felt



Composition 100% Recycled PE.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light USA 5




Fabric



Category A
Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics
Weight 405 g/m² | 11.94 oz/yd²
Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek
Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A
Fastness to light EU: 4 | USA 4
Fastness to rubbing EU: Wet 3-4 | Dry 4-5
Fastness to crocking USA: Wet 5 | Dry 5




Terra



Category B
Composition 100% Pure New Wool
Weight 370 g/m² | 10.91 oz/yd²
Abrasion resistance 40.000 Martindale, 25,000 Wyzenbeek
Flammability EU: BS5852 CRIB 5 | BS5867 PART 2 : 2008 : TYPE B
EN: 1021.2/2006 | USA: CAL TB 117
Fastness to light EU 5 | USA 5
Fastness to rubbing EU: Wet 4 | Dry 4
Fastness to crocking USA: Wet 4 | Dry 4



Hero




Category C
Composition 96% new wool, 4% nylon
Weight 580 g/lin.m
Abrasion resistance 45.000 Martindale rubs, EN ISO 12947
Flammability EN 1021-1/2 | DIN 4102 B2 | NF D 60 013
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260
IMO A.652 (16)
Fastness to light Note 5-6, ISO 105-B02
Fastness to rubbing (ISO) dry 4-5, wet 4-5
Pilling Note 3-4, EN ISO 12945




kvadrat

Dimensions


Panel A

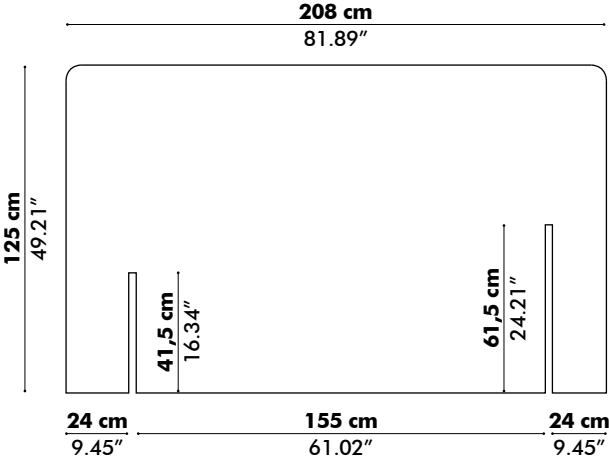



Panel B

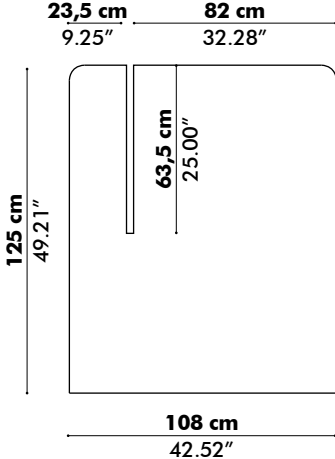

Panel C




Thickness

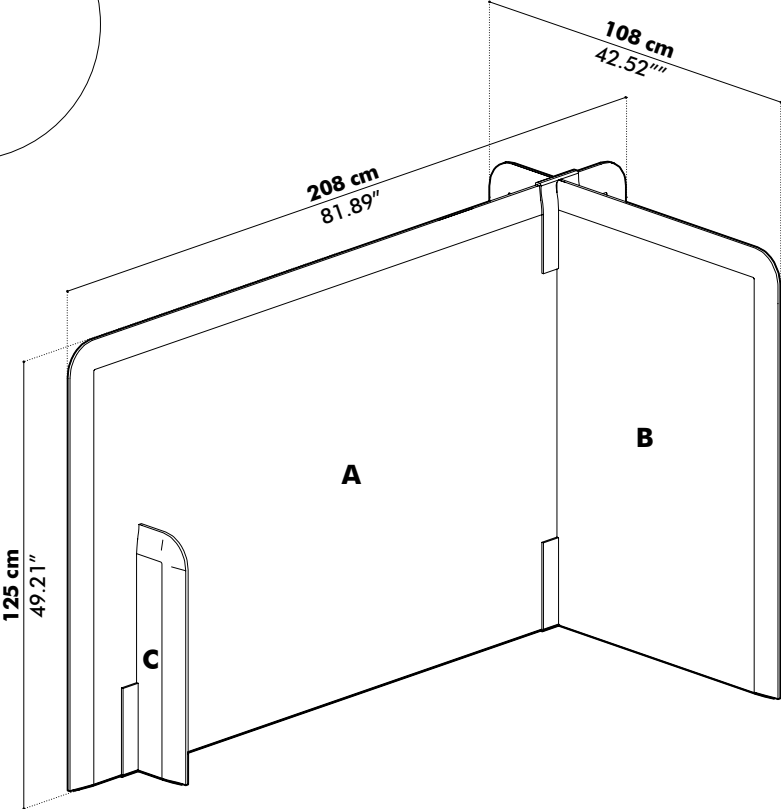

Acoustics

Equivalent sound absorption area in m² per object

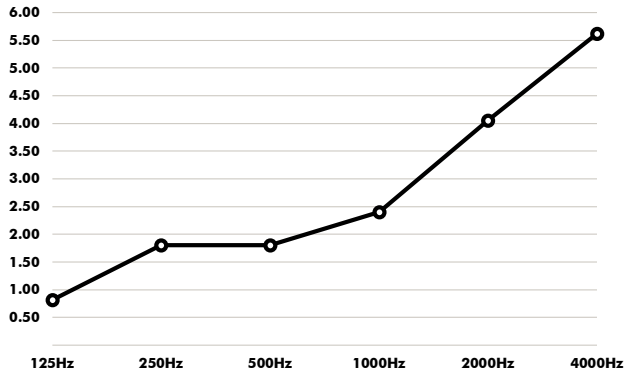

Hz	Aeq
125	0.82
250	1.80
500	1.80
1000	2.40
2000	4.05
4000	5.62